Patent marked 54

(19) Japanese Patent Bureau (JP)

(12) OFFICIAL BULLETIN OF PATENT PRESENTED TO THE PUBLIC (A) (11) APPLICATION NUMBER 1994 6— 114037

(43) Date of publication: 26/Apr/94

51 – Int. C	l. Identifi	ication number	Regula	tion number within the bureau	F1	
A 6 1 B	5/07			8932-4C		
	1/00	3 2 0	В	3119-4C		
	8/12			7507-4C		
G 0 2 B	23/24		. C	9317-2K		•

Judged claim. Last claim. Number of claims - 2 (total - 8 pages)

		·
(21) Application number:	1992-3 – 266347	(71) Applicant: 00000376
		Olympus Ltd.
		Tokyo
(22) Date of application:	19/Feb/91	(72) Inventor:
	-	Kido Masahiro [?]
		Tokyo, Olympus Ltd.
,		(72) Inventor:
•		Mizuno Hitachi
		Tokyo, Olympus Ltd.
		(72) Inventor:
		Takayama Shuichi
	·	Tokyo, Olympus Ltd.
		(74) Primary examiner: Suzue Takehiko

(54) NAME OF THE INVENTION: CAPSULE DEVICE FOR MEDICAL USE

(57) ABSTRACT

PURPOSE:

The purpose of this invention is to supply a capsule device for medical use that is easy to insert into cavities, causes little suffering to the patient, and is able to carry out many functions.

CONSTITUTION:

The capsule is inserted into the body cavity, and performs diagnosis and medical treatment. There are many capsules 2a, 2b ... that have many functions. Each capsule 2a, 2b ... has a slit (5) to insert guide wire (4) for guidance within the body, around the said guide pipe there is micromotor (6) and there is a device for coupling each capsule 2a, 2b ... on condition that the functions of the said capsules in the body move.

EXTENT OF THE CLAIM OF THE PATENT:

CLAIM 1: There are a number of_capsules; they have measurement and treatment functions. The capsule is inserted into a body cavity, and there are devices in the capsules for diagnosis and medical treatment. In each capsule, there is a slit for guidance inside the body, and a device to lead the capsule inside the body. The medical capsule is special in that is has a device that connects each capsule so that the function moves in the body.

CLAIM 2: In the compact medical capsule device, which is easily inserted into the body and which performs the diagnosis, there are a number of sensors for diagnosis and these sensors, while inserted in the body, can perfor many diagnostic functions.

0027

EFFICACY OF THE INVENTION:

As was explained above, this invention is easy to insert into the body cavity, the patient experiences minimal pain, and there are many functions that it can perform.

BRIEF DESCRIPTIONS OF THE DRAWINGS:

- Fig. 1: This view briefly describes the connection status of the capsule device for medical use in presentation number 1 of the invention.
- Fig. 2: Brief description of the medical capsule device system in the same presentation no. 1.
- Fig. 3: Description of the use of the medical capsule device in the same presentation no. 1.
- Fig. 4: Description of the use of the bend of the medical capsule device in the same presentation no. 1.

- Fig. 5: Squint view that shows a variation to the above-mentioned presentation no. 1.
- Fig. 6: Squint view of the medical capsule device showing example no. 2 of the invention.
- Fig. 7: Squint view showing the development of the capsule of example no. 2 of the invention.

- Fig. 8: Cross section of the capsule for medical use mentioned above.
- Fig. 9: Squint section of the capsule showing example no. 3 of the invention.
- Fig. 10: Squint section of construction of the capsule for medical use showing example no. 3 of the invention.
- Fig. 11: Cross section of the capsule for medical use mentioned above.
- Fig. 12: Side view showing the connecting part of the capsule for medical use of example no. 3 of the invention.
- Fig. 13: Side view showing a variation of the connecting part in the capsule of example no. 3.
- Fig. 14: Squint view of the capsule for medical use showing example no. 4 of the invention.
- Fig. 15: Squint view of the capsule for medical use showing the same example no. 4.
- Fig. 16: Cross section of the capsule for medical use showing example no. 4 of the invention mentioned above.
- Fig. 17: Partial cross section of the capsule for medical use showing example no. 4 of the invention mentioned above.

FIGURES LEGEND:

1 medical capsule device

2a photographing element capsule

2b sensor capsule

2c amplifying, transmitting circuit capsule

2d bend [or curve] control capsule

2e source of electricity capsule

2h capsule for photographing side images

2I high frequency adjustment capsule

2j laser capsule for management

3 body of the capsule

4 guide wire

5 guiding slit

6 micromotor for the running of the capsule

16 connecting, bending part

22 magnetic body


23 electromagnet

40 body of the capsule

41 base

- 42 memory sheet made of resin to register the shape
- 51 supersonic wave oscillation element
- 52 unit
- 55 wire
- 60 body of the capsule
- 61 base
- 62 sheet
- 63 pressure sensor

Under the drawing:

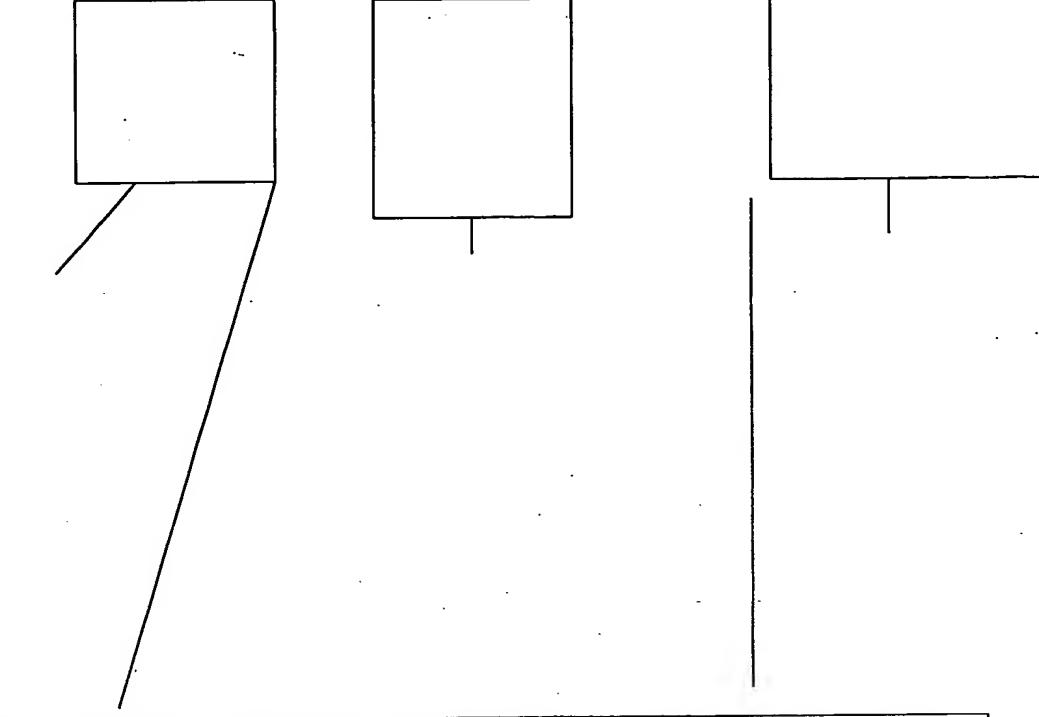

Device showing the sensor data regenerating pictures outside the body Device for control of bonding and curving	Micromotor control device
--	---------------------------

Under the drawings:

Continued from the front page:

TATSUMI Y. (72) Inventor:

Olympus, Tokyo

(72) Inventor:

FUTAKI T.

Olympus, Tokyo

(72) Inventor:

YOSHINO KENJI

Olympus, Tokyo

(72) Inventor:

ISHIKAWA MEIBUN

Olympus, Tokyo YAMAGUCHI T.

(72) Inventor:

Olympus, Tokyo

(72) Inventor:

UEDA Y.

Olympus, Tokyo